

TIDY TIES



Light Duty Tie




Standard Duty Tie



Heavy Duty Tie



Ultra Heavy Duty Tie

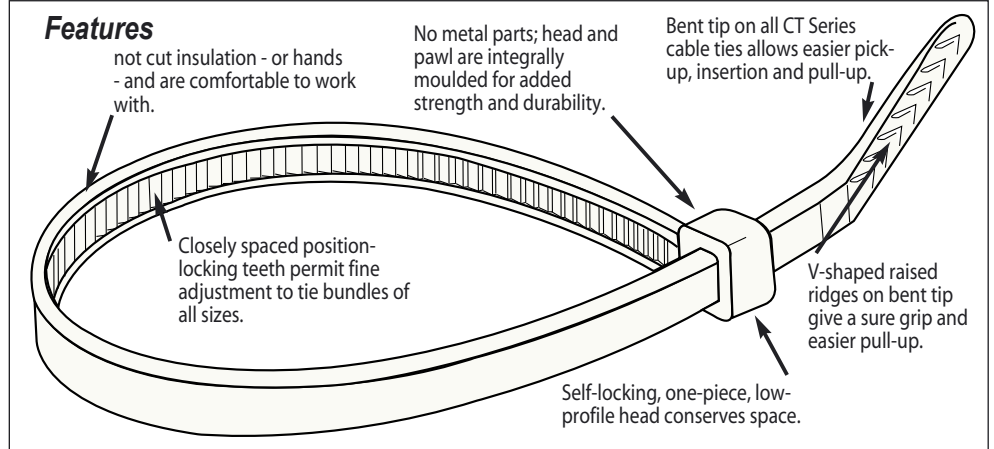

Technical Data	
Conformant Standards U.L.: Mil Spec: IEC; VDE; DIN Refer M.S. 3367 M.S. 3368-physical dimensions Mil-S-23190E - testing Mil-Std-105D - sampling Mil-C-45662-test equip. calibration Mil-1-45208A-Q.C.manual & systems	Material NATURAL - Nylon 66 with additives BLACK - Nylon 66 with UV stabilisers
Smoke Emission Low smoke Halogen free	Material tensile strength 80 N/mm ² or 11200 p.s.i.
Operating Temperature -40°C to 85°C	Electrical Data Breakdown voltage 20kV/mm Volume resistivity 2 x 10 ¹⁰ ohm cm Moisture content 2.5% w.v. @ 23% / 50% / RH
Flammability Passed - U.L. 94V-2	UV stability Exceeds ASTM-D-4066 with 2.5% carbon black giving nominal 15 yrs normal exposure to UV. with less than 10% yield in tensile strength.

Product Code	Quantity per pack	Legend:
TT 100 X 2.5	per 100	TT = Tidy Ties
TT 143 X 3.2	per 100	RTT = Reusable Tidy Tie
TT 190 X 4.8	per 100	
TT 280 X 4.8	per 100	
TT 368 X 4.8	per 100	
TT 380 X 7.6	per 100	
TT 550 X 13.0	per 100	
TT 762 X 9.0	per 100	
RTT 200 X 4.7	per 100	
RTT 300 X 8.0	per 100	